

STANDARD CONSTRUCTION

MIAMI-DADE COUNTY, FLORIDA NOA NO. 22-0224.08 EXPIRATION DATE 6/30/2025 APPROVAL DATE 4/7/202

PAGE 1 OF 1

(ENGINEER'S) SUBMITTAL DATA

MODEL WLF-DA15: 6" DEEP FIXED HURRICANE LOUVER

MIAMI-DADE, FLORIDA, NOA NO. 22-0224.08

EXPIRATION DATE: JUNE 30, 2025

APPROVAL DATE: APRIL 7, 2022

MAXIMUM DESIGN PRESSURE RATING

ל <u>Grille tech inc.</u>


SINGLE UNIT: +/- 140.0 PSF MULTIPLE UNIT: +/- 140.0 PSF

PRODUCT APPROVAL IS IN ACCORDANCE WITH THE LATEST FLORIDA BUILDING CODE. DESIGN WIND LOADS SHALL BE AS PER SECTIONS 1619 AND 1620 OF 2007 BUILDING CODE AND ALSO SHALL BE IN ACCORDANCE WITH ASCE-7.

APPLICATIONS

THE MODEL WLF-DA15 IS A STATIONARY LOUVER DESIGNED TO PROTECT EITHER EXHAUST OR INTAKE OPENINGS IN A BUILDINGS EXTERIOR WALLS. THIS LOUVER HAS BEEN REVIEWED BY THE MIAMI-DADE COUNTY FLORIDA PRODUCT CONTROL DIVISION AND ACCEPTED BY THE BOARD OF RULES AND APPEALS (BORA) TO BE USED IN HIGH VELOCITY HURRICANE ZONES (HVHZ) AS WELL AS OTHER REGIONS AS LONG AS THEY DO NOT EXCEED THE +/- 140 PSF RATING. THE LOUVER HAS ALSO BEEN TESTED TO PROVIDE LARGE MISSLE IMPACT RESISTANCE AND IS CONSTRUCTED OF ALUMINUM TO RESIST RUST OXIDATION.

FEATURES

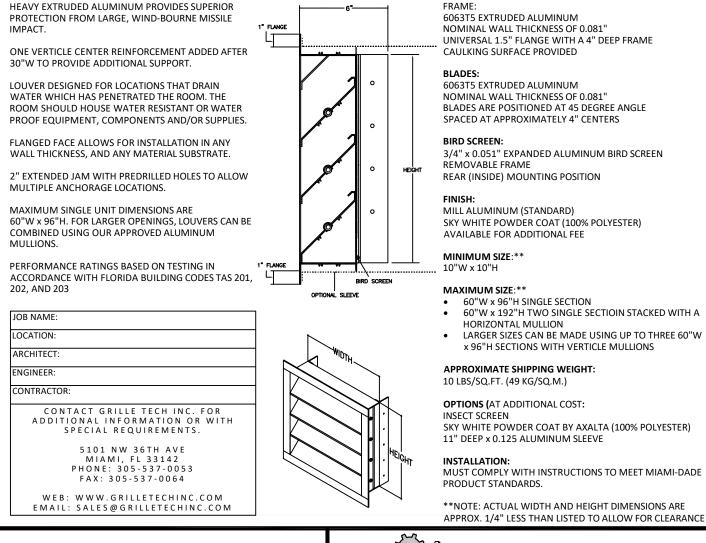

WLF-DA15 ALUMINUM WALL LOUVER SYSTEM ENGINEER'S SUBMITTAL DATA
 DRAWN BY:
 MR
 Date
 6/13/17
 Scale
 Drawing ML
 Drawing ML

 DIECKED BY:
 IG
 Mate
 4/7/22
 REVISION
 4/7/22
 WLF-DA15

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION NOTICE OF ACCEPTANCE (NOA)

Grille Tech, Inc. 5101 NW 36 Avenue Miami, FL 33142

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Model WLF-DA15 Aluminum Louver

APPROVAL DOCUMENT: Drawing No. **0551-0402-10**, titled "WLF-DA15 Aluminum Wall Louver", sheets 1 through 6 of 6, dated 04/30/2009, with revision 3 dated 02/22/2022, prepared by Wolters Engineering, Inc, signed and sealed by Scott Wolters, P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: A permanent label with the manufacturer's name or logo, manufacturing plant's city, state, model/series, and the following statement: "Miami-Dade County Product Control Approved", is to be located on each unit.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA revises NOA # 20-0302.04 and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Carlos M. Utrera, P.E.





NOA No. 22-0224.08 Expiration Date: June 30, 2025 Approval Date: April 7, 2022 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. Evidence submitted under previous NOA's

A. DRAWINGS "Submitted under NOA #15-0218.08"

1. Drawing No. **0551-0402-10**, titled "WLF-DA15 Aluminum Wall Louver", sheets 1 through 6 of 6, dated 04/30/2009, with revision 1 dated 02/10/2015, prepared Wolters Engineering, Inc, signed and sealed by Scott Wolters, P.E.

B. TESTS "Submitted under NOA # 10-0518.05"

- 1. Test reports on 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 2) Large Missile Impact Test per FBC, TAS 201-94

3) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of WLF-DA15 Aluminum Louver Systems", prepared by Hurricane Test Laboratory, Inc., Report No. **0551-0204-10**, dated 04/30/2010, signed and sealed by Vinu J. Abraham, P.E.

C. CALCULATIONS "Submitted under NOA #10-0518.05"

1. Anchor verification calculations and structural analysis prepared by Wolters Engineering, Inc, dated 05/12/2010, signed and sealed by Scott Wolters, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS "Submitted under NOA #15-0218.08"

1. Statement letter of code conformance with 2010 and 5th edition (2014) FBC issued by Wolters Engineering, Inc, dated 05/20/2015, signed and sealed by Scott Wolters, P.E.

"Submitted under NOA # 10-0518.05"

- 2. No financial interest letter issued by Wolters Engineering, Inc, dated 10/13/2009, signed and sealed by Scott Wolters, P.E.
- **3.** Code compliance letter issued by Hurricane Test Laboratory, Inc., dated 04/29/2010, signed and sealed by Vinu J. Abraham, P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 22-0224.08 Expiration Date: June 30, 2025 Approval Date: April 7, 2022

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. Evidence submitted under previous NOAs

A. DRAWINGS "Submitted under NOA #17-0919.08"

1. Drawing No. **0551-0402-10**, titled "WLF-DA15 Aluminum Wall Louver", sheets 1 through 6 of 6, dated 04/30/09, with revision 2 dated 09/08/2017, prepared Wolters Engineering, Inc, signed and sealed by Scott Wolters, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS "Submitted under NOA # 20-0302.04"

1. Statement letter of code conformance with the 6th Edition (2017) FBC issued by Wolters Engineering, Inc, dated 02/19/2020, signed and sealed by Scott Wolters, P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 22-0224.08 Expiration Date: June 30, 2025 Approval Date: April 7, 2022

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. New evidence submitted

A. DRAWINGS

1. Drawing No. **0551-0402-10**, titled "WLF-DA15 Aluminum Wall Louver", sheets 1 through 6 of 6, dated 04/30/09, with revision 3 dated 02/22/2022, prepared Wolters Engineering, Inc, signed and sealed by Scott Wolters, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance with the 7th Edition (2020) of the FBC, issued by Wolters Engineering, Inc, dated 02/22/2022, signed and sealed by Scott Wolters, P.E.

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 22-0224.08 Expiration Date: June 30, 2025 Approval Date: April 7, 2022 GENERAL NOTES

1. THIS ALUMINUM WALL LOUVER PRODUCT IS LARGE MISSILE IMPACT RESISTANT AND DOES NOT REQUIRE THE USE OF SHUTTERS.


▲2. THIS LOUVER SYSTEM HAS BEEN TESTED TO TAS 201-94, TAS 202-94 (LOADS ONLY), AND TAS 203-94 (REF. HTL TEST REPORT 0551-0204-10) AND MEETS THE REQUIREMENTS OF THE 7TH EDITION (2020) FLORIDA BUILDING CODE, INCLUDING THE HVHZ PROVISIONS.


3. THIS LOUVER PRODUCT IS NOT TESTED FOR WATER INFILTRATION RESISTANCE. THESE LOUVERS ARE TO BE INSTALLED IN A LOCATION WHERE THE ROOM BEHIND THE LOUVER IS DESIGNED TO DRAIN WATER PENETRATING INTO THE ROOM, AND THE ROOM WILL HOUSE WATER RESISTANT / WATER PROOF EQUIPMENT, COMPONENTS, OR SUPPLIES. 4. THE STRUCTURAL ADEQUACY AND SUITABILITY OF THE WOOD BUCKS OR OTHER SUBSTRATES TO WHICH THE LOUVER SYSTEM IS TO BE INSTALLED SHALL BE VERIFIED BY A LICENSED ENGINEER OR REGISTERED ARCHITECT OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION.


5. AN ALLOWABLE STRESS INCREASE HAS NOT BEEN USED IN THE ANCHOR ANALYSIS FOR THIS SYSTEM 6. WHERE DISSIMILAR MATERIALS OF ANY TYPE (LOUVER SYSTEM, ANCHORAGE, OR SUBSTRATE) COME IN CONTACT, THE MATERIALS MUST BE PROPERLY COATED OR OTHERWISE PROTECTED AS REQUIRED BY FBC TO PREVENT GALVANIC REACTIONS. SPECIAL CARE SHALL BE TAKEN TO PROTECT ALUMINUM LOUVERS FROM PRESSURE TREATED LUMBER, AND ALL FASTENERS SHALL BE SELECTED WITH PROPER COATING OR MATERIAL TYPES TO PREVENT REACTIONS WITH LOUVERS OR SUBSTRATES.

7. MINIMUM LOUVER SIZE IS 10" X 10"


8. LOUVERS MAY BE USED IN SINGLE UNIT CONFIGURATION, DOUBLE WIDE OR TRIPLE WIDE MULLED, OR DOUBLE HIGH MULLED CONFIG. 9. THE MAXIMUM DESIGN PRESSURE OF THIS LOUVER SYSTEM IS + / - 140.0 P.S.F.

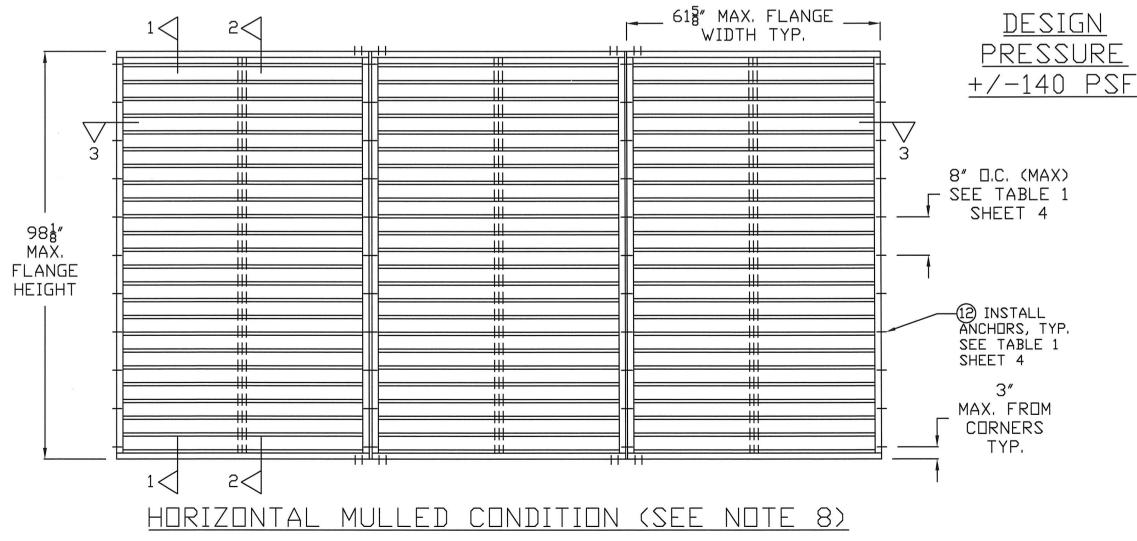

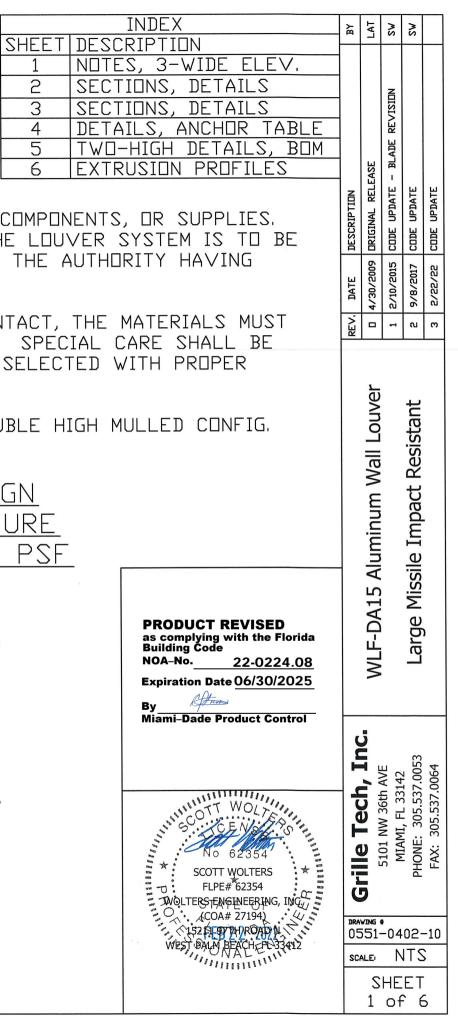


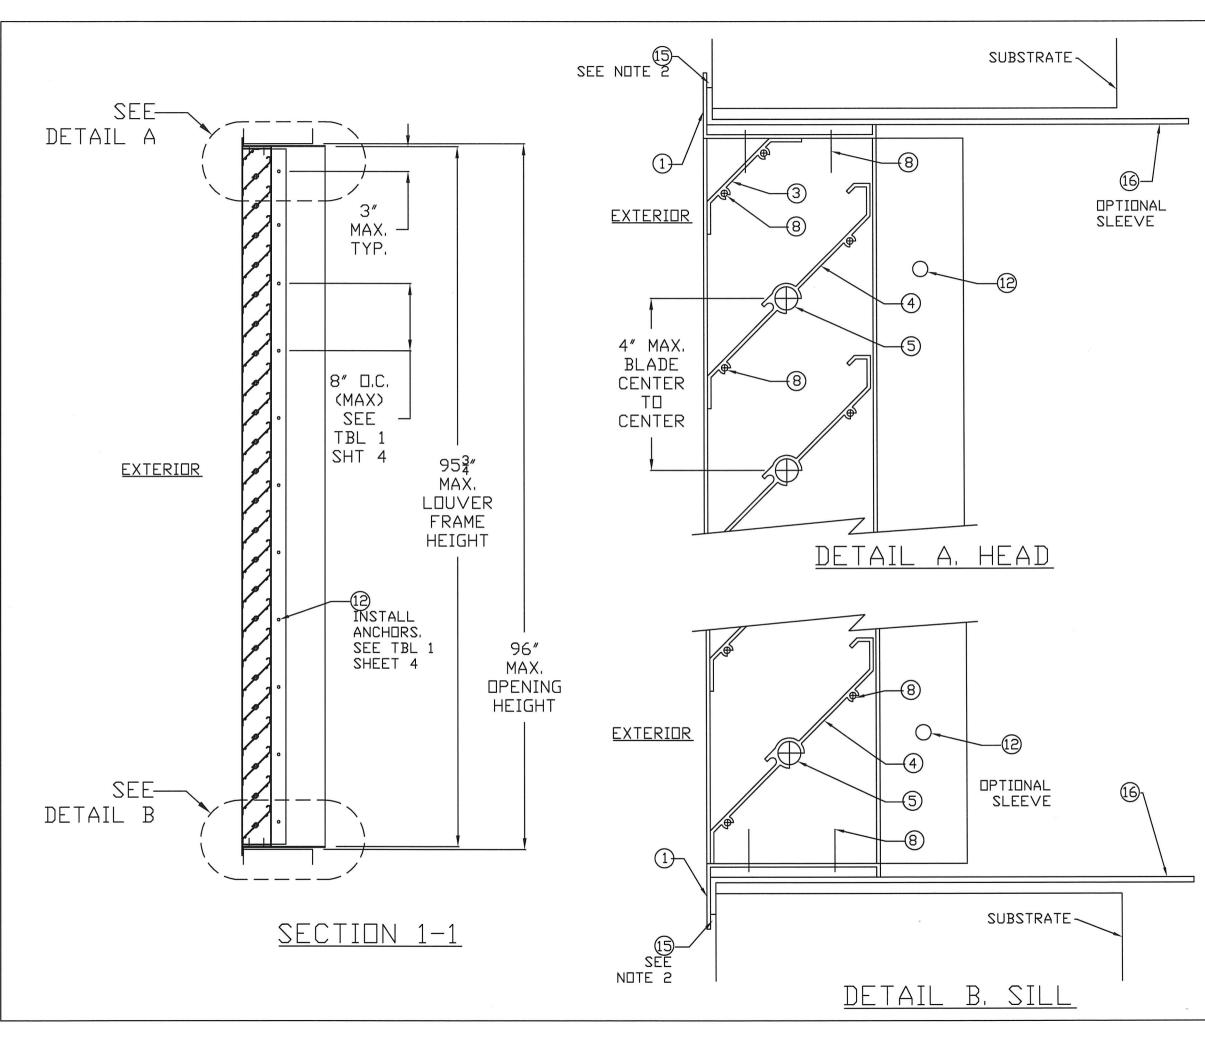

	-			ITE		
(COA# 27194). 1521 POPTTH ROAD W WESSP PALM, BEACH, FL 33412 FEB'2'2' 2022	Miami-Dade Product Control Miami-Dade Product Control MOLT WOLT CENSS CENSS NO 62354 * SCOTT, WOLTERS FLPE# 62354 WOLTERSAENGINEERING, INC. (COA# 27194). SIS21997TH ROADAN	PRODUCT REVISEDas complying with the FloridaBuilding CodeNOA-No.22-0224.08Expiration Date 06/30/2025ByMmm	E HEAD OR SILL, ILL COVERAGE DOW SILICONE BETWEEN VE FRONT FLANGE	-		
05				REV. DATE	DESCRIPTION	ВΥ
ALE	9	WLF-DA15 A	Aluminum Wall Louver	D 4/30/2009	DRIGINAL RELEASE	LAT
-04 N				1 2/10/2015	CODE UPDATE - BLADE REVISION	ΝS
02- NTS ET	PHONE: 305.537.0053	Large Missi	ssile Impact Resistant	2 9/8/2017	CODE UPDATE	MS
S	FAX: 305.537.0064)		3 2/22/22	CODE UPDATE	

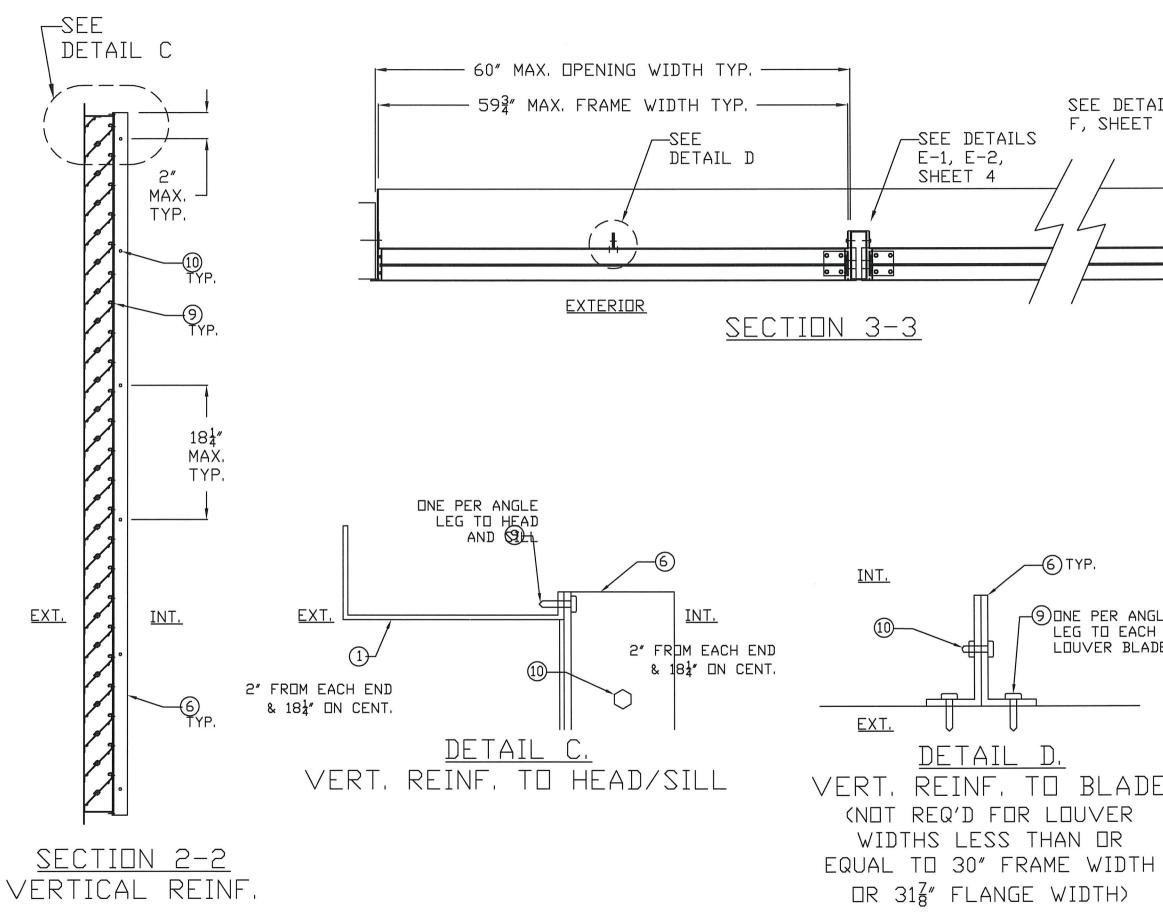


		ВΥ	LAT	٨S	NS	
AIL		DESCRIPTION	DRIGINAL RELEASE	CODE UPDATE - BLADE REVISION	CODE UPDATE	CODE UPDATE
		DATE	4/30/2009	2/10/2015	9/8/2017	2/22/22
		REV.		-	ຎ	m
GLE H DE	PRODUCT REVISED as complying with the Florida Building Code NOA-No. 22-0224.08 Expiration Date 06/30/2025 By Miami-Dade Product Control		WLF-DA15 Aluminum Wall Louver		Large Missile Impact Resistant	-
E	* SCOTT WOLT KO 62354 * SCOTT WOLTERS FLPE##2354 WOLTERS ENGINEERING, INC (COA# 27194) US211 97TH ROAD'N WESTOPALM BEACH, FL 33412 KESTOPALM BEACH, FL 33412 KESTOPALM BEACH, FL 33412	DRA O S		• -04	Image: 1 Image: 1	-10
	art hhitte				ET	
			3	0		6

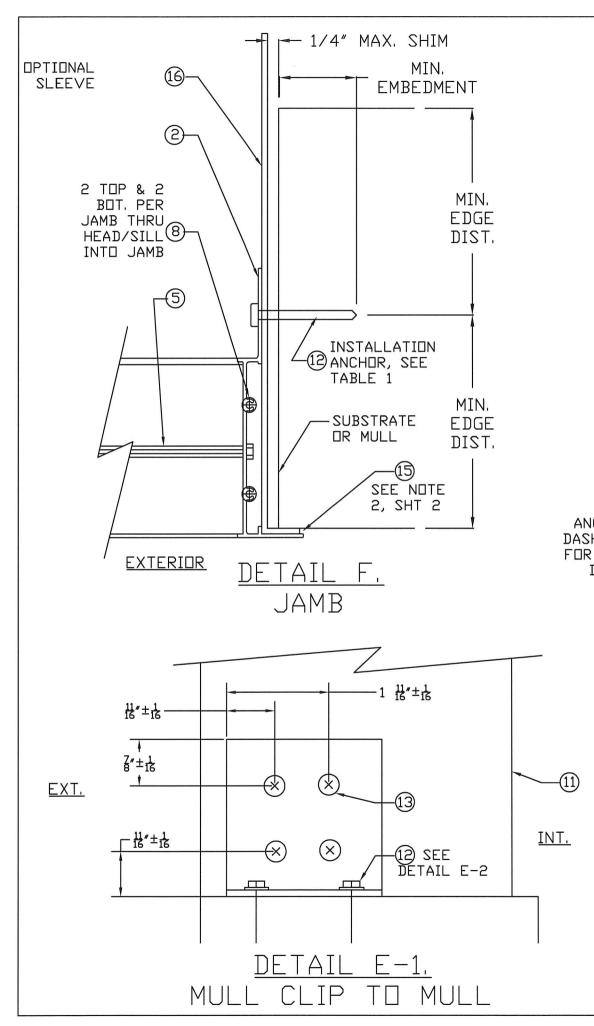


ABLE 1. QUALIFIED INSTALLATION ANCHOR INFORMATION D ANCHOR SUBSTRATE MIN. MIN. EDGE EMBED. DISTANCE A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" B 1/4" ITW TAPCON GROUT FILLED CMU 1 1/4" 2 1/2" C 1/4" ITW TAPCON WOOD (G=0.42 MIN) 1 3/8" 1" D #12 WOOD SCREW GRADE 5 1/8" ALUM. 6063-T5 MIN 1/2" ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION D ANCHOR ULLION CLIP ANCHOR INFORMATION D ANCHOR SUBSTRATE MIN. D MIN. EDGE QTY EMBED. DISTANCE PER CLIP 96" MAX LENGTH VERTICAL MULLION, 61 5/8" MAX LOUVER FLANGE WDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/4" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN 1" 4 60" MAX LENGTH HORIZONTAL MULLION, 98 1/8" MAX LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1 " 2 1/2" 4 D #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN 11" 4 60" MAX LENGTH HORIZONTAL MULLION, 98 1/8" MAX LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1 " 2 1/2" 4 SHDWN IN KES REG'D R TYPE H INT. INT. INT. INT. INT. INT. INT. INT.		REV. DATE DESCRIPTION BY	Aluminum Wall Louver	1 2/10/2015 CODE UPDATE - BLADE REVISION SW	sile Impact Resistant 2 9/8/2017 CODE UPDATE 5V	
A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" B 1/4" ITW TAPCON GROUT FILLED CMU 1 1/4" 2 1/2" C 1/4" ITW TAPCON WOOD (G=0.42 MIN) 1 3/8" 1" D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" E #12 TEK SMS GRADE 5 1/8" ALUM. 6063-T5 MIN. - 1/2" F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION ID ANCHOR SUBSTRATE MIN. EDGE PER CLIP 96" MAX LENGTH VERTICAL MULLION, 61 5/8" MAX LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/2" 4 H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 4 4 H #14 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX LENGTH HORIZONTAL MULLION, 98 1/8" MAX LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1 1/2" 4 H #14 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 1/4" <		DATE	D 4/30/2009 DRIGINAL	1 2/10/2015 CODE UPDATE - BLADE	2 9/8/2017 CODE	
B 1/4" ITW TAPCON GROUT FILLED CMU 1 1/4" 2 1/2" C 1/4" ITW TAPCON WOOD (G=0.42 MIN) 1 3/8" 1" D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" E #12 WOOD SCREW GRADE 5 1/8" ALUM. 6063-T5 MIN. - 1/2" F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION ID ANCHOR SUBSTRATE MIN. DISTANCE PER CLIP 96" MAX LENGTH VERTICAL MULLION, 61 5/8" MAX LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/2" 4 H #14 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX LENGTH HORIZONTAL MULLION, 98 1/8" MAX LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX LENGTH HORIZONTAL MULLION, 98 1/8" MAX LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D		DATE	D 4/30/2009 DRIGINAL	1 2/10/2015 CODE UPDATE - BLADE	2 9/8/2017 CODE	
C 1/4" ITW TAPCON WOOD (G=0.42 MIN) 1 3/8" 1" D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" E #12 TEK SMS GRADE 5 1/8" ALUM. 6063-T5 MIN. - 1/2" F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION - 1/2" ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION - 1/2" P6" MAX. LENGTH VERTICAL MULLION, 61 5/8" MAX. LOUVER FLANGE WDTHS G 5/16" ITW TAPCON G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/2" 4 H #14 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN) 2 1/2" 6 I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN) - 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1 1 4 61" #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN) - 1" 4 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1		DATE	D 4/30/2009 DRIGINAL	1 2/10/2015 CODE UPDATE - BLADE	2 9/8/2017 CODE	
D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" E #12 TEK SMS GRADE 5 1/8" ALUM. 6063-T5 MIN 1/2" F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN 1/2" ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION D ANCHOR SUBSTRATE MIN. MIN. EDGE QTY 96" MAX. LENGTH VERTICAL MULLION, 61 5/8" MAX. LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/4" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 2 1/2" 6 1 #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) - 1" 4 61 #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 D #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 D #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 D #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 D #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 D #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 D #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 D #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 III 4 SHEWN IN VES REQ'D R TYPE H DD DNLY,		DATE	D 4/30/2009 DRIGINAL	1 2/10/2015 CODE UPDATE - BLADE	2 9/8/2017 CODE	
E #12 TEK SMS GRADE 5 1/8" ALUM. 6063.T5 MIN. - 1/2" ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION ID ANCHOR SUBSTRATE MIN. MIN. EMBED. DISTANCE PER CLIP 96" MAX LENGTH VERTICAL MULLION, 61 5/8" MAX. LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/4" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN) 2 1/2" 6 1 I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN) 2 1/2" 2 1/2" 4 G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/2" 2 1/2" 6 I #14 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 D #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN.		DATE	D 4/30/2009 DRIGINAL	1 2/10/2015 CDDE UPDATE -	2 9/8/2017 CODE	
F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION ID ANCHOR SUBSTRATE MIN. MIN. EDGE QTY 96" MAX. LENGTH VERTICAL MULLION, 61 5/8" MAX. LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/4" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 2 1/2" 6 I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 H #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 D #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 D #12 WOOD SCREW GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 ID #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 <		DATE	D 4/30/2009 DRIGINAL	1 2/10/2015 CDDE UPDATE -	2 9/8/2017 CODE	
ABLE 2. QUALIFIED MULLION CLIP ANCHOR INFORMATION DANCHOR SUBSTRATE MIN. MIN. EDGE QTY EMBED. DISTANCE PER CLIP 96" MAX. LENGTH VERTICAL MULLION, 61 5/8" MAX. LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/2" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 2 1/2" 6 1 #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 SHEWN IN- NES REQ'D R TYPE H DD DNLY.		DATE	D 4/30/2009 DRIGINAL	1 2/10/2015 CDDE	2 9/8/2017 CODE	
ID ANCHOR SUBSTRATE MIN. EMBED. MIN. EDGE DISTANCE QTY PER CLIP 96" MAX. LENGTH VERTICAL MULLION, 61 5/8" MAX. LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/4" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 2 1/2" 6 I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 ID #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 III III III IIII IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII		DATE	D 4/30/2009 DRIGINAL	1 2/10/2015 CDDE	2 9/8/2017 CODE	
EMBED. DISTANCE PER CLIP 96" MAX. LENGTH VERTICAL MULLION, 61 5/8" MAX. LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/4" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 2 1/2" 6 I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4		DATE	D 4/30/2009	1 2/10/2015 CDDE	2 9/8/2017 CODE	
96" MAX. LENGTH VERTICAL MULLION, 61 5/8" MAX. LOUVER FLANGE WIDTHS G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/4" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 2 1/2" 6 I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 III III IIII IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII		DATE	D 4/30/2009	1 2/10/2015	2 9/8/2017	
G 5/16" ITW TAPCON CONCRETE (2.9 KSI MIN) 2 1/4" 2 1/2" 4 H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 2 1/2" 6 I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 Image: Construct Struct				1	വ ເ	
H #14 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 2 1/2" 2 1/2" 6 I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 Image: Contract of the state of the sta				1	വ ເ	
I #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1" 4 60" MAX_LENGTH HORIZONTAL MULLION, 98 1/8" MAX_LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 Image: Stee Stee Stee Stee Stee Stee Stee St				1	വ ເ	
60" MAX. LENGTH HORIZONTAL MULLION, 98 1/8" MAX. LOUVER FLANGE HEIGHTS A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 III IIII IIII IIII IIII IIII <td cols<="" td=""><td></td><td>REV</td><td></td><td></td><td></td></td>	<td></td> <td>REV</td> <td></td> <td></td> <td></td>		REV			
A 1/4" ITW TAPCON CONCRETE (3.2 KSI MIN) 1" 2 1/2" 4 D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 Image: SHEWN IN- VES REQ'D Image: Stee Tell 1 Image: Stee Tell 1 NES REQ'D Image: Stee Tell 1 Image: Stee Tell 1 Image: Stee Tell 1 Image: Stee Type H Image: Stee Tell 1 Image: Stee Tell 2. Image: Stee Tell 2.			Wall Louver		: Resistant	
D #12 WOOD SCREW GRADE 5 WOOD (G=0.42 MIN) 1 3/8" 1" 4 F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN. - 1/2" 4 (1) <tr< td=""><td></td><td></td><td>Wall Louver</td><td></td><td>: Resistant</td></tr<>			Wall Louver		: Resistant	
F #12 TEK SMS GRADE 5 1/8" STEEL 36 KSI MIN 1/2" 4 (1) (2) SEE TBL 1 (3) SEE DETAIL E-1 R TYPE H DDD DNLY.			Wall Louver		: Resistant	
11 (2) SEE TBL 1 (3) SEE DETAIL E-1 R TYPE H DDD DNLY.			Wall Louv	and a second provide the	: Resistant	
SHOWN IN- NES REQ'D R TYPE H DOD ONLY.			Wall Lo		: Resista	
	PRODUCT REVISED as complying with the Florida Building Code NOA-No. <u>22-0224.08</u> Expiration Date <u>06/30/2025</u> By	_	WLF-DA15 Alumin	55	Large Missile Imp	
$\frac{1}{2} + \frac{1}{3} + \frac{1}$	Miami-Dade Product Control Miami-Dade Product Control * WOLT WOLT E NO 62354 * SCOTT WOLTERS FLPE#*62354 WOLTERS ENGINEERING, INCAT * IS211 97TH ROAD N WEST PALM BEACH, FL 33412 O NAL FEB 2 21 2022	Crillo Toch		-04	-02-1 NTS	

ΓΔΒΙ	E 1. QUALIFIED INSTALLATION /						BΥ	LAT	۶K	SV
	ANCHOR	SUBSTRATE	MIN.	MIN. EDGE					~	
			EMBED.	DISTANCE						
Α	1/4" ITW TAPCON	CONCRETE (3.2 KSI MIN)	1"	2 1/2"					z	
В	1/4" ITW TAPCON	GROUT FILLED CMU	1 1/4"	2 1/2"					REVISION	
С	1/4" ITW TAPCON	WOOD (G=0.42 MIN)	1 3/8"	1"					₽ 2	
		WOOD (G=0.42 MIN)	1 3/8"	1"					BLADE	
	#12 TEK SMS GRADE 5	1/8" ALUM. 6063-T5 MIN.	-	1/2"				Ы	BL	
F	#12 TEK SMS GRADE 5	1/8" STEEL 36 KSI MIN.	-	1/2"			z	RELEASE	Ľ	<u>ا</u> ا
TABL	.E 2. QUALIFIED MULLION CLIP	ANCHOR INFORMATION					DESCRIPTION	IAL R	UPDATE	UPDATE
ID	ANCHOR	SUBSTRATE	MIN.	MIN. EDGE	QTY		SCR			
			EMBED.	DISTANCE	PER CLIP		Ä			
		AL MULLION, 61 5/8" MAX.			HS		щ	4/30/2009	2/10/2015	9/8/2017
G	5/16" ITW TAPCON	CONCRETE (2.9 KSI MIN)	2 1/4"	2 1/2"	4		DATE	/30/	9	9/8/2017
Н		WOOD (G=0.42 MIN)	2 1/2"	2 1/2"	6		>			
Ι	#12 TEK SMS GRADE 5	1/8" STEEL 36 KSI MIN.	-	1"	4		REV.		٦	ณ
	60" MAX. LENGTH HORIZON									
Α	1/4" ITW TAPCON	CONCRETE (3.2 KSI MIN)		2 1/2"	4					
D	#12 WOOD SCREW GRADE 5	WOOD (G=0.42 MIN)	1 3/8"	1"	4			ēr		ب
F	#12 TEK SMS GRADE 5	1/8" STEEL 36 KSI MIN.	-	1/2"	4			S		ant
INES DR VDDI	$\begin{array}{c} \square WN IN \\ S REQ'D \\ TYPE H \\ D \squareNLY, \\ ABLE 2 \rangle \qquad \qquad INT. \\ \hline \\ $			DÉTAIL E-1 SEE TABLE	2.	PRODUCT REVISED as complying with the Florida Building Code NOA-No. <u>22-0224.08</u> Expiration Date <u>06/30/2025</u> By	_	WLF-DA15 Aluminum Wall Louver		Large Missile Impact Resistant
	EXT. SEE NOTE 2,SHEET 215	DETAIL E-	<u>2.</u>	© ©		Miami-Dade Product Control			·04(Hd
	MULL (ANI		MUL1 B214	RATE		FEB 2 21 2022		Sł	HEI	

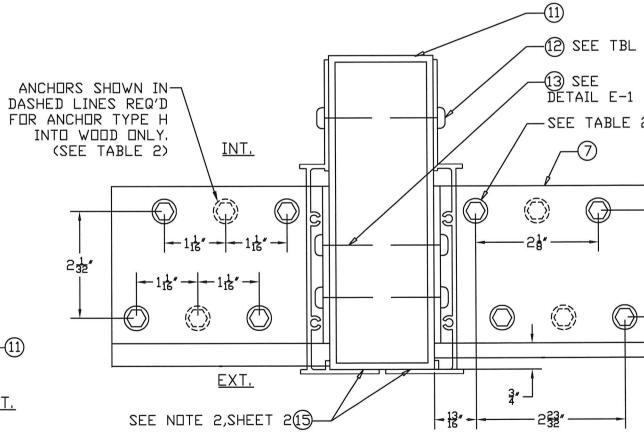

[BILL OF MATER
60" MAX, OPENING WIDTH		ITEM #	PART	DESCRIP
59⅔″ MAX. FRAME WIDTH		1	STATISTICS OF CARDING STATISTICS	FRAME HEAD
	<u>two-high mulled</u>	2		FRAME J
SEE DET,	CONDITION	3		TOP BLA
(I) D, SHT 3		4	4903	BLADE
			+303	1/2"-14 ALL THREADED ZINC CO
<u>_H</u>	SEE	5		AND NUT BOT
618" MAX. FLANGE WIDTH	DETAIL A 3"	6	8149	1"X2"X1/8" (VERTICAL
OIS MAX, FLANGE WIDTH	SHEET 2 \ _ MAX.	7	10029	3"X3"X1/8" ANGL
2<		8		#10 P.P.H. X 1" SHEE
		9		#8 H.W.H X 3/4" SHEE
		10		1/4"-20 X 3/4" ZINC COAT
		11		2"X6"X1/8" ALUM
		12		INSTALLATION ANCHOR, S
	INSTALL	13		#12 P.P.H. X 1" TEK SH
		14		#12 P.P.H. X2" TEK SH
	SEE TBL 1	15		DOW 795 SILICONE BU
	3/	16		SLEEVE: 0.85"X11.15"X1/8" FOR
	MAX, MAX,			
	EXT. B" D.C. (MAX) SEE	EXT. SEE SHEET 2 13" 13" 13" 232"		
	SEE DETAIL B SHEET 2	<u>₽″</u> MUL (N□	LCL	<u>SETAIL E-3.</u> IP TO SUBSTRA SILL ATTACHM

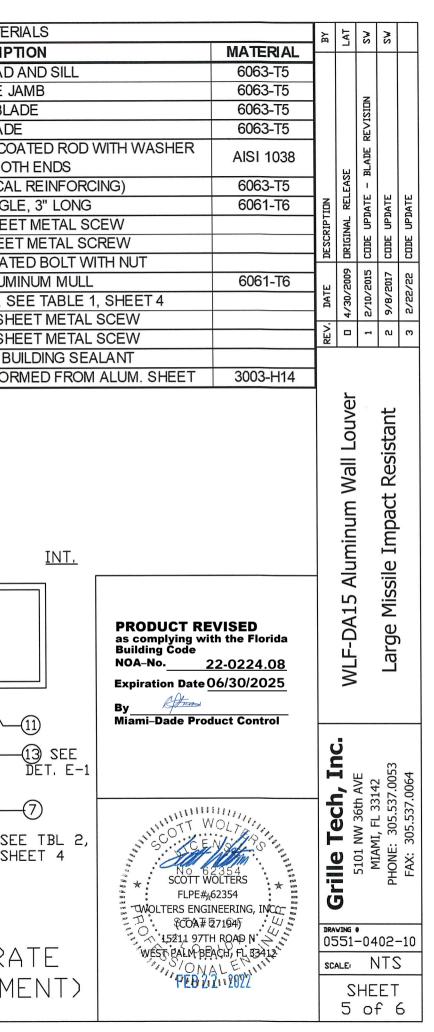

•

