
STANDARD CONSTRUCTION

FRAME:
 6063T5 HEAVY DUTY EXTRUDED ALUMINUM
 NOMINAL WALL THICKNESS OF 0.075"
 UNIVERSAL 1" FLANGE

BLADES:
 6063T5 EXTRUDED ALUMINUM
 NOMINAL WALL THICKNESS OF 0.092"
 SPACED AT APPROX. 1/2" CENTERS

FINISH:
 POLYESTER SKY WHITE POWDER COAT (STANDARD)
 MILL ALUMINUM (OPTIONAL)

DUPONT 100% POLYESTER POWDER COATING GIVES AN ATTRACTIVE BRIGHT WHITE FINISH AND PROVIDES ADDITIONAL PROTECTION FROM AGING AND WEAR.

OPTIONS:
 STEEL OPPOSED BLADE DAMPER (OBD)

FEATURES




HEAVY EXTRUDED ALUMINUM PROVIDES SUPERIOR DURABILITY AND RESISTS CORROSION.

HIDDEN SCREW HOLE DESIGN OFFERS A CLEAN, ATTRACTIVE APPEARANCE.

BLADE CORE COMPLETELY REMOVABLE FROM FRONT TO ALLOW ACCESS FOR MAINTENANCE.

PENCIL PROOF AND 15 DEGREE DEFLECTION CORE OPTIONS AVAILABLE.

FLANGED FACE CREATES A GOOD VENT-TO-WALL SEAL AND AN EASY CAULKING SURFACE.

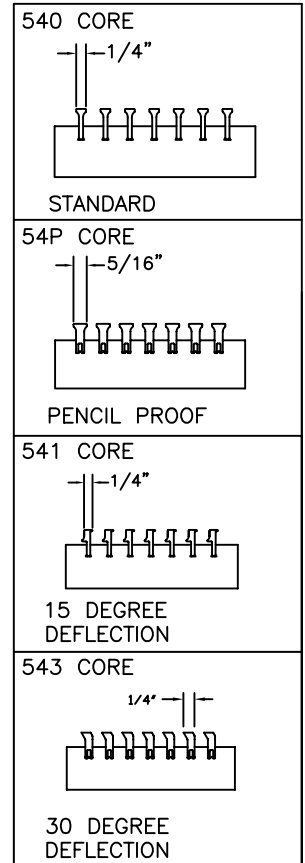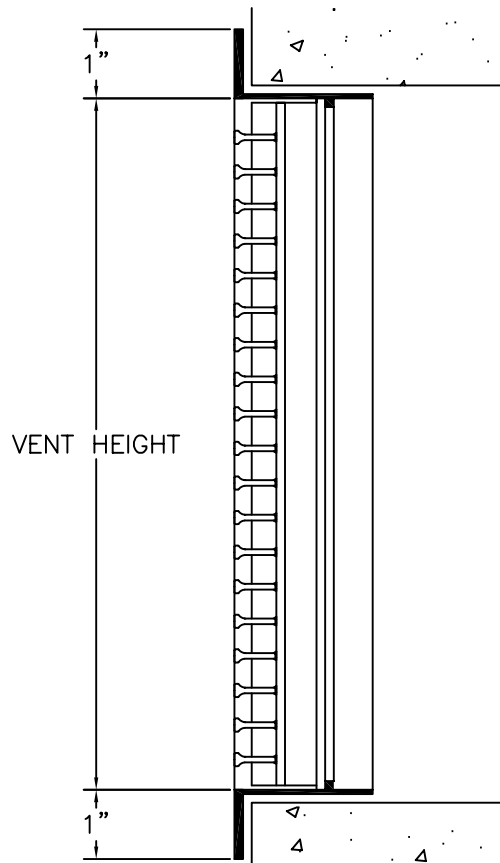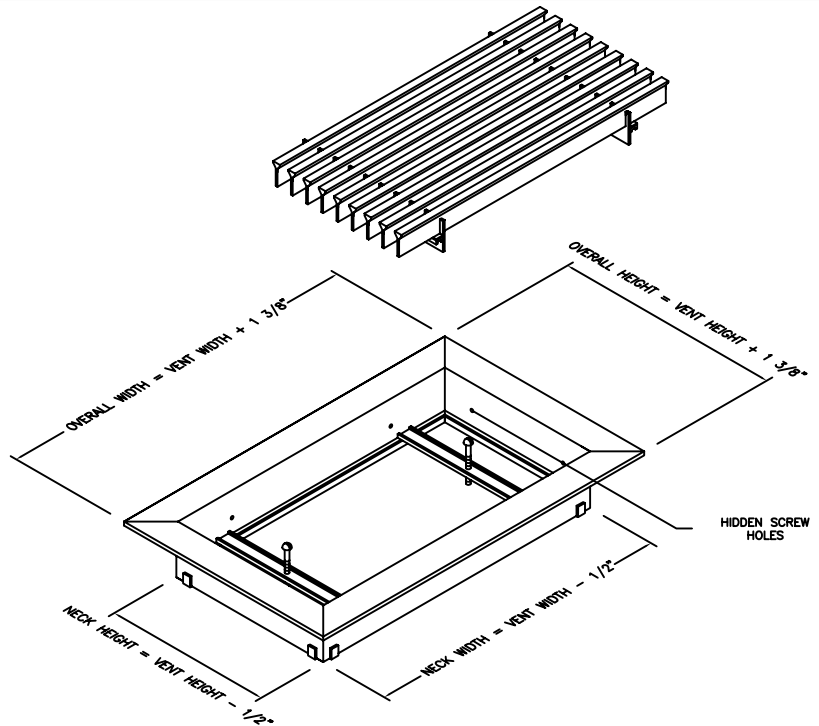

JOB NAME:
LOCATION:
ARCHITECT:
ENGINEER:
CONTRACTOR:
CONTACT GRILLE TECH INC. FOR ADDITIONAL INFORMATION OR WITH SPECIAL REQUIREMENTS.
5101 NW 36TH AVE MIAMI, FL 33142 PHONE: 305-537-0053 FAX: 305-577-0064
WEB: WWW.GRILLETECHINC.COM EMAIL: SALES@GRILLETECHINC.COM

BGOHRC

 REMOVABLE CORE VENT
 PRODUCT SPECIFICATIONS

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

DRAWN BY: AF	DATE: 08/28/07	SCALE: NOT TO SCALE
CHECKED BY: IG	DATE: 09/20/09	REVISION: B

DRAWING NO. BGOHRC