

MODEL NUMBER	NUMBER SLOTS	AVAILABLE LENGTHS	SLOT WIDTH S	FACE WIDTH A
LPBX75	1	24",36",48",60"	3/4"	1-3/4"
	2			3-1/2"
	3			5-1/4"
	4			7"
LPBX10	1	24",36",48",60"	1"	2"
	2			4"
	3			6"
	4			8"
LPBX15	1	24",36",48",60"	1-1/2"	2-3/4"
	2			5-1/4"

RIGID CEILING INSTALLATION REFER TO DWG. NO. SD201-C


MODELS AVAILABLE

- UNINSULATED:
- LPBX75 (3/4" SLOT WIDTH)
 - LPBX10 (1" SLOT WIDTH)
 - LPBX15 (1-1/2" SLOT WIDTH)
- INSULATED: (ALL INTERIOR PLENUM SURFACES)
- LPBXI75 (3/4" SLOT WIDTH)
 - LPBXI10 (1" SLOT WIDTH)
 - LPBXI15 (1-1/2" SLOT WIDTH)
- IMPACT INSULATION: (OPPOSITE INLET ONLY)
- LPBXIA75 (3/4" SLOT WIDTH)
 - LPBXIA10 (1" SLOT WIDTH)
 - LPBXIA15 (1-1/2" SLOT WIDTH)

- MATERIAL:
- PLENUM - STEEL
 - PATTERN CONTROLLERS - ALUMINUM
 - INSULATION - 1/2" THICK TUF-SKIN

- FINISH:
- ALL TEES: WHITE
 - REMAINDER OF FACE, BLADES: BLACK

AVAILABLE TYPES

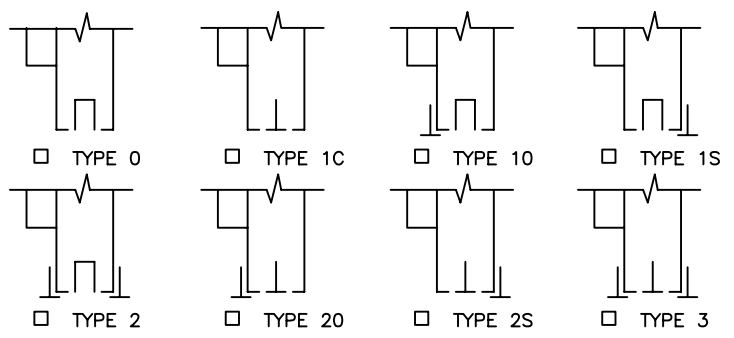

- NOTES:
1. SIZE 5 & 6 INLETS ARE ROUND, ALL OTHERS ARE EQUIVALENT OVAL, 8" MINIMUM, 12" MAXIMUM.
 2. AIR PATTERN CONTROLLERS ARE FIELD ADJUSTABLE FOR LEFT/RIGHT BLOW.
 3. T-BAR CENTER NOTCH AVAILABLE.

TITLE:

LPBX OR LPBXI
PLENUM DIFFUSER



DRN BY: CV	DATE: 5/24/01	SCALE: NTS	DRAWING NO. PB201-A
CKD BY:	DATE:	REV: 03	