
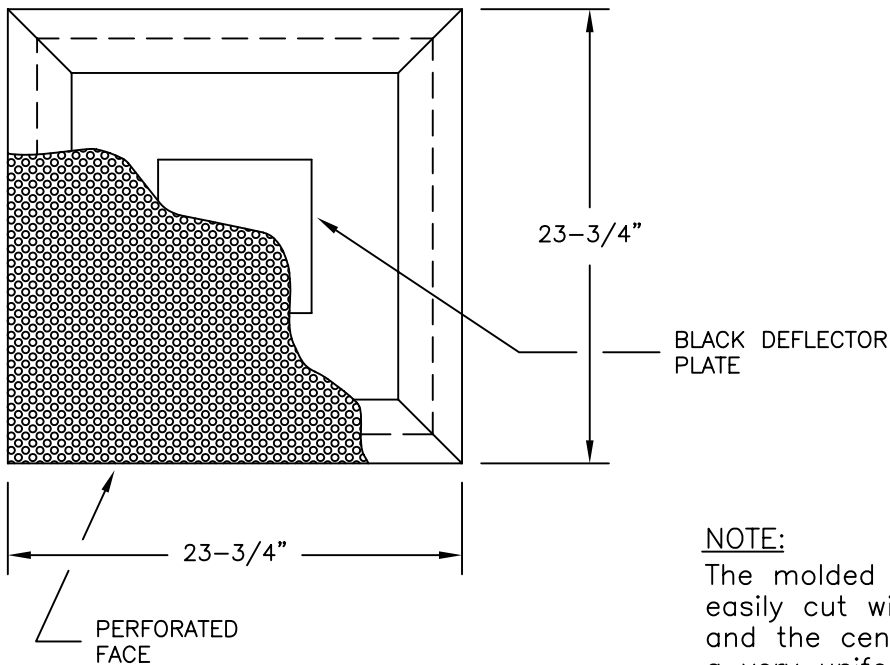


CONSTRUCTION:

- Complete molded R6 insulated back
- Perforated face - 3/16" diameter holes on 1/4" staggered centers
- Deflector plate for uniform supply air pattern or removable for return air use

FEATURES:

- Superior sound absorption
- Light weight - Easily suspended
- Horizontal air flow pattern
  - No downdrafts
- Condensation free operation
- Electro-static baked enamel finish

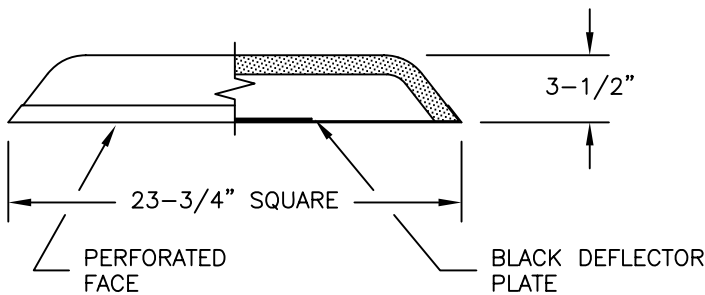

NOTE:

The molded back is easily cut with a pocket knife and the center connection provides a very uniform, widely dispersed, air flow without downdrafts.

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

TITLE:  
 MODEL PDB  
 PERFORATED FACE, MOLDED BACK  
 CEILING DIFFUSER



DRN BY: CV	DATE: 11/9/99	SCALE: NTS	DRAWING NO.
CKD BY: DJL	DATE: 2/15/00	REV: AO	PD301-A