



**Perforated Ceiling Diffusers**  
**Steel . Fire Rated . Lay in Face**




UNDERWRITERS LABORATORIES INC.  
 CLASSIFIED  
 CEILING AIR DIFFUSERS  
 TESTED IN ACCORDANCE WITH UL 263

**Model PBZZU . Supply . 1, 2, 3 or 4 Way Adjustable Discharge Pattern**

**Model PRBZZU . Return Diffuser (Adjustable Patterns Deflectors not Available over Return Models)**


**Model SCFBZZU . Square cone, Round neck diffuser, 360° pattern.**

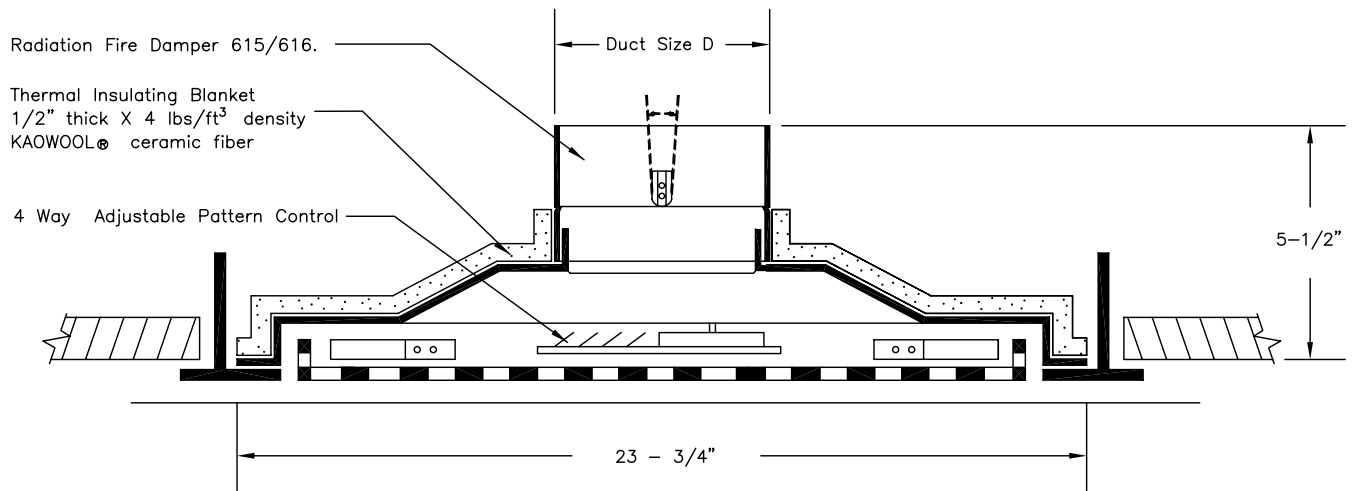


Face or Ceiling Module Size	Duct Size D						
	6" Dia.	8" Dia.	10" Dia.	12" Dia.	14" Dia.	20 x 20	22 x 22
24 x 24	X	X	X	X	X	X	X

**SUPPLY / RETURN**

Duct Size D
6" Dia./ 6" Dia.
8" Dia./ 8" Dia.
10" Dia./ 10" Dia.
12" Dia./ 12" Dia.
14" Dia./ 14" Dia.
N/A / 20 X 20
N/A / 22 X 22

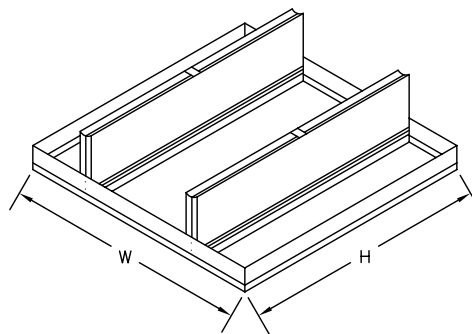

UL Listed Radiation Fire Damper Model # 615.

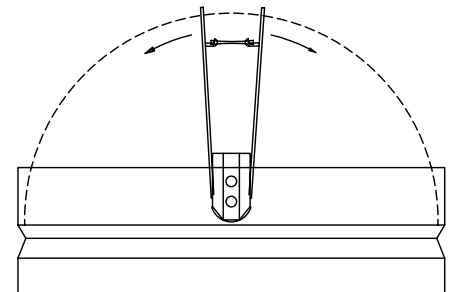

UL Listed Radiation Fire Damper Model # 616.

**Accessories (Optional)**

Fusible Link: UL Listed 165° F Standard or 212° F (Optional).