




SCFI

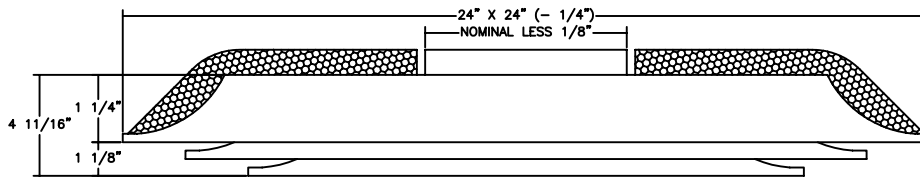


THE SCFI IS A HIGH CAPACITY, THREE SQUARE CONE DIFFUSER (FOUR CONE MODEL AVAILABLE) FOR 24" X 24" T-BAR INSTALLATION. IT IS MANUFACTURED WITH DQSK STEEL TO GIVE SUPERIOR DURABILITY AND STRENGTH. THE UNIT IS BACKED WITH A LAYER OF R6 FIBERGLASS INSULATION WITH A FSK (FOIL BARRIER). THE FINISH IS 100% POLYESTER DUPONT POWDER COATING (SKY WHITE) AND IS UNCONDITIONALLY GUARANTEED AGAINST RUST FOR FIVE YEARS. THE MODEL SCFI IS AVAILABLE IN 6", 8", 10", 12" AND 14" COLLAR DIAMETERS. IT PROVIDES A HORIZONTAL 360 DEGREE AIR PATTERN WITH EXCEPTIONAL PERFORMANCE IN ALL CFM RANGES, INCLUDING VARIABLE AIR VOLUME SYSTEMS. A SMA FRAME IS ALSO AVAILABLE FOR SURFACE MOUNT APPLICATIONS.

STEEL DAMPERS (MODEL BD OR OBD) ARE ACCESSIBLE THROUGH THE FACE AND ARE AVAILABLE IN ALL DIAMETERS. STANDARD FINISH ON THESE DAMPERS IS BROWN.

ADDITIONAL ACCESSORIES ARE AVAILABLE. SEE PAGE SCF/EPR01A.

SCFIU

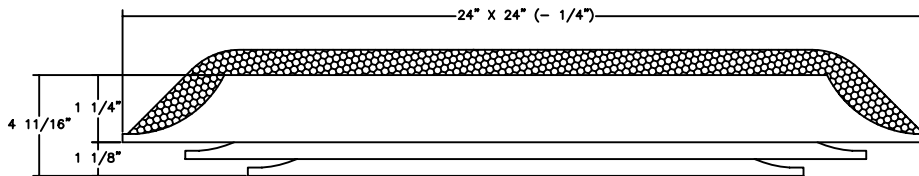

THE SCFIU IS A HIGH CAPACITY, THREE SQUARE CONE DIFFUSER (FOUR CONE MODEL AVAILABLE) FOR 24" X 24" T-BAR INSTALLATION. IT IS MANUFACTURED WITH DQSK STEEL TO GIVE SUPERIOR DURABILITY AND STRENGTH. THE UNIT IS BACKED WITH A LAYER OF R6 FIBERGLASS INSULATION WITH A FSK (FOIL BARRIER). THE FINISH IS 100% POLYESTER DUPONT POWDER COATING (SKY WHITE) AND IS UNCONDITIONALLY GUARANTEED AGAINST RUST FOR FIVE YEARS. THE MODEL SCFIU BACK IS DESIGNED TO BE FIELD CUT TO FIT VARIOUS DIAMETERS OF DUCT COLLARS. IT PROVIDES A HORIZONTAL 360 DEGREE AIR PATTERN WITH EXCEPTIONAL PERFORMANCE IN ALL CFM RANGES, INCLUDING VARIABLE AIR VOLUME SYSTEMS. A SMA FRAME IS ALSO AVAILABLE FOR SURFACE MOUNT APPLICATIONS.

ADDITIONAL ACCESSORIES ARE AVAILABLE. SEE PAGE SCF/EPR01A.

SCFI, SCFIU

SQUARE FACE/ROUND NECK DIFFUSER
PRODUCT DESCRIPTION

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



DRAWN BY:	AF	DATE:	08/02/07	SCALE:	NOT TO SCALE	DRAWING NO.:	SC1B
CHECKED BY:	IG	DATE:	04/05/07	REVISION:	IG		